


HIGHWIRE

INSTALLATION MANUAL



Where to use HIGHWIRE

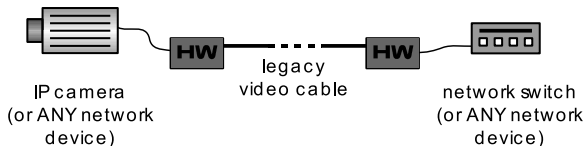

HIGHWIRE units are used to convert conventional Ethernet to a signal that can be carried by 75ohm coaxial video cables such as RG59.

HIGHWIRE makes it possible to upgrade installed analogue cameras to high-quality digital IP cameras without the expense of replacing existing cabling.

In the example shown a pair of HIGHWIRE units is used to allow an IP (network) camera to communicate with other network devices over an existing coaxial video cable.

Cable connection diagram



EC Declaration of Conformity

In accordance with EN 45014:1998

We, Veracity UK Ltd. of 6 Barns Street, Ayr, KA7 1XA declare that the equipment "HIGHWIRE" High speed data converter model number VHW-HW01

conforms to the essential protection requirements of the EMC Directive 89/336/EEC as amended. The following EMC standards have been applied:

BS EN 55022:1998 Emissions (Class B Radiated)

BS EN 55024:1998 Immunity (BS EN 61000-4-2:1995 Immunity to ESD, BS EN 61000-4-3:2000 Immunity to Radiated RF Fields (3V/m))

I hereby declare that the equipment named above has been found to comply with the relevant sections of the above referenced specifications. The unit complies with all essential requirements of the EMC Directive.

Responsible Person *Alastair McLeod* Mr Alastair McLeod, Director
Issued 25th September 2006 at Ayr



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Installation sequence

1. Mounting

⚠ The HIGHWIRE unit should only be installed indoors or in an appropriately rated enclosure

The unit should be securely mounted and should not be supported by the attached cables. Mounting bracket part no VHW-WMB can be used for bolting the unit to a wall or structure. Rack panel part no VHW-1U allows installation of up to eight HIGHWIRE units in 1U of a 19 inch rack.

The unit's chassis should be connected to earth via the BNC connector before any other cables are connected. The earth connection can be made via a mounting bracket or the enclosed ground strap.

Inline ground isolator part no VHW-XF should be fitted where there is a significant ground potential difference between each end of the cable.

2. Power Connection

⚠ HIGHWIRE should only be used with a Class II Isolated power supply

The unit can be powered from either a 12V DC or 24V AC power supply (PSU), and adjusts to its type and voltage automatically.

If the PSU is shared with other equipment such as a camera, ensure that the total load current will not exceed the PSU's rated output.

The power supply voltage should be within the range specified. If in any doubt, measure the voltage at the PSU's connector before and then after connecting the HIGHWIRE or other equipment.

If an existing power supply is not available, up to two HIGHWIRE units can be powered by PSU part no VWH-12VPSU-xx (xx = UK, EU or USA). Part no VHW-RMPSU-xx is designed for rackmount installations and can power up to eight units.

The PSU cables should be bared, tinned and securely connected to the HIGHWIRE power plug before switching on the PSU. Only one wire should be connected to each of the power plug's screw terminals, with polarity as indicated on the unit's top panel.

The green LED will blink every 1~2 seconds to indicate the presence of power.

3. Coaxial Cable Connection

Connect the unit's BNC socket to the coaxial cable. If another HIGHWIRE unit is connected at the far end and powered up, then the green LED will light steadily to indicate a good connection.

In some installations, cable condition will force the units to reduce their connection speed, and this is indicated by the green LED flashing (approximately half-on, half-off).

Only two units should be connected, one at each end of the cable. HIGHWIRE is not compatible with other equipment such as analogue video amplifiers.

4. Ethernet Cable Connection

Connect the unit's RJ45 Ethernet jack to the camera or other network equipment using a standard Ethernet cable. Both patch and crossover type Cat5 or Cat6 cables are supported.

The amber LED will light to indicate a network connection, and will blink off during network activity.

Power Over Ethernet

With the Power Over Ethernet (POE) option, HIGHWIRE can automatically enable up to 6.5 Watts of power (IEEE Class 1 or 2) to compatible network cameras, via its Ethernet port.

A minimum 12 Watt PSU is required for HIGHWIREs in POE installations.