

EMBEDDED VMS STORAGE SYSTEM

**COLDSTORE®
2U DW**

EMBEDDED VMS

Application | COLDSTORE 2U DW delivers enterprise recording performance for all types of installations

COLDSTORE®
with embedded
DW Spectrum video
management system
in a single box

The powerful DW Spectrum VMS combined with COLDSTORE® sequential recording and extreme disk reliability provide a unique CCTV recording solution in a single box.

DW spectrum®



- | Integrated DW Spectrum server and storage system
- | Up to 256 full HD channels at 30fps per channel
- | Up to 208TB capacity using only 50 watts
- | Incorporates COLDSTORE LAID™ and SFS™
- | Fully-featured, powerful DW Spectrum VMS*
- | DW Cloud option for mobile device access



Embedded DW Spectrum transforms COLDSTORE into a fully-featured video management system server

DW Spectrum is one of the most powerful and easy-to-use VMS software solutions available, combined with COLDSTORE video storage system, it offers unbeatable system performance.

Veracity - Digital Watchdog Partnership

Veracity and Digital Watchdog are technology partners and together offer a one box solution for video management and IP video storage. DW Spectrum has developed into one of the most powerful, easy-to-use and cost-effective video management systems available. DW Spectrum embedded in COLDSTORE provides the optimum combination for high performance video surveillance recording and management.

DW Spectrum Architecture

The DW Spectrum system consists of four components - desktop, server, cloud and mobile. The desktop component is the client application which can run on any PC system (Windows, Mac or Linux). The server component is effectively the VMS engine, which in this case runs inside the COLDSTORE storage system.

The cloud component enables simple remote connectivity, streaming, and management of one or an unlimited number of DW Spectrum installations, whilst the mobile application allows users to view, control and playback their cameras from tablets or smartphones.

DW Spectrum Desktop Client

The DW Spectrum Desktop application is a rich media player with a flexible GRID interface, unmatched speed and responsiveness, instant notifications, an embedded browser, and a user experience unlike any other video

management software. All features are available on every system, stand-alone or enterprise, providing a consistent user experience on all sites.

DW Spectrum Server Software

The DW server auto-discovers 99% of known IP cameras and is ONVIF S and T compatible, including H.265 support. Dual (hi-res and low-res) streams enable adaptive scaling for DW Client displays using minimum bandwidth. A hive architecture synchronizes user settings and system configurations between all local servers. Combined with automatic failover protection, this ensures a resilient system with no single point of failure in multiple server installations. DW Spectrum license keys are available from all Digital Watchdog distributors in North America to activate recording channels.

DW Spectrum Cloud

Administrators can connect systems to DW Cloud for easy merging and management of remote sites. DW systems can be accessed anywhere, via DW desktop or mobile clients.

DW Spectrum Mobile Client

DW Mobile is a low-latency client application for iOS and Android which provides remote viewing, PTZ control, fisheye dewarping, playback and smart searching from a smartphone or tablet. Connecting with encrypted links via DW Cloud, it provides secure access to an unlimited number of DW systems, with live thumbnails and remote system control.

DW Spectrum Feature Set

- Flexible grid user interface
- Camera analytics support
- Easy bookmarking and export
- Bitrate throttling
- Camera hotspots
- Enhanced export
- Advanced PTZ control
- Advanced user management
- Archive integrity check
- Adaptive video scaling
- Fast search and smart search
- Manual event triggers
- Two-way audio support
- Event rules engine
- Optimized update process
- Universal fisheye dewarping
- Custom video watermarking
- Virtual camera support
- Webcam support
- Notifications panel
- IP Camera auto-discovery
- ONVIF S and T support
- H.265 support
- Server hive architecture
- Automatic failover
- Encrypted video
- Synchronization of configurations
- Encrypted cloud connections
- Mobile device support
- Unlimited scalability
- Shared access
- Cloud client system
- Low latency
- Live thumbnails
- No recurring license fees
- Analytics object search via mobile
- Video source SDK
- DW Server API
- Metadata SDK

Full integration development tools are available for DW Spectrum.

COLDSTORE features combined with DW Spectrum Pro license model deliver the ultimate in low TCO



COLDSTORE Technology

Our Linear Array of Idle Disks (LAID™) and vibration-free Sequential Filing System (SFS™) delivers a powerfully simple storage system for resilient video surveillance. This makes COLDSTORE 2U an ideal server/storage platform for DW Spectrum, with up to 182TB effective storage capacity (using 26TB disks, see the capacity table under the Technical Specifications).


Extended Disk Lifetimes

COLDSTORE disks are used sequentially, saving power and greatly reducing temperature, vibration and wear - the three primary disk killers. Combined with SFS, this greatly extends disk lifetimes. COLDSTORE uses a mirrored overlapping pair writing pattern which delivers the redundancy of RAID1 on write, but unlike RAID1 does not require twice the number of disks.

Low Power, Low TCO

All COLDSTORE models offer very low power consumption with minimal cooling costs and lower UPS backup power costs. When combined with the one-time license fee model for the embedded DW Spectrum VMS software, the overall Total Cost of Ownership of the COLDSTORE 2U DW solution is dramatically reduced for the end-user.

COLDSTORE 2U DW APPLICATION DIAGRAM

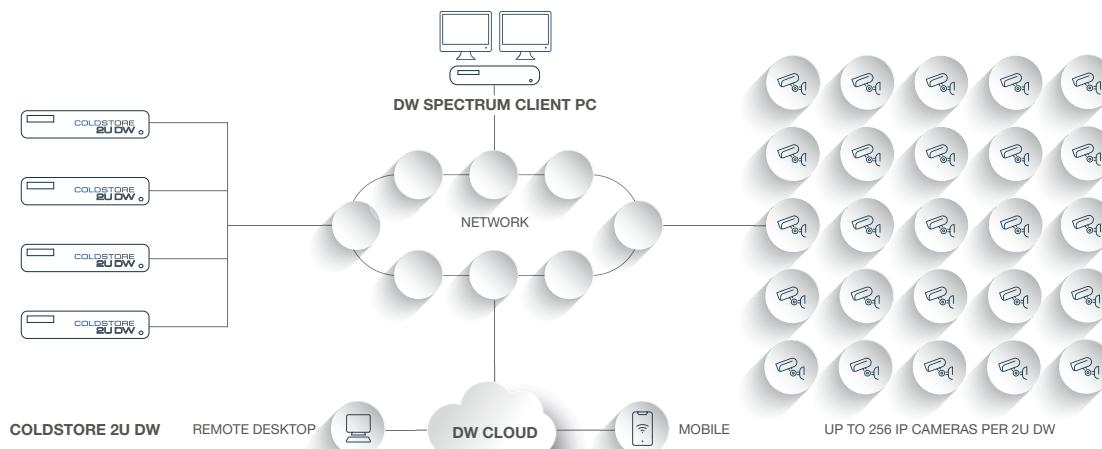

Single or multiple COLDSTORE 2U DW servers may be used with single or multiple client workstations.

Workstations may be Windows, Linux or Mac and may be local, or connected remotely through DW Cloud.

DW Cloud also supports access via iOS or Android mobile devices.

STORAGE PERIOD VERSUS CHANNEL COUNT

TB REQUIRED	2Mbps per Channel				4Mbps per Channel				6Mbps per Channel			
	Channels	32ch	64ch	100ch	256ch	32ch	64ch	100ch	128ch	32ch	64ch	100ch
30 days	23TB	46TB	71TB	182TB	46TB	91TB	143TB	182TB	68TB	137TB	3U DW	3U DW
60 days	46TB	91TB	143TB	3U DW	91TB	182TB	3U DW	3U DW	137TB	3U DW	4U DW	4U DW
90 days	68TB	137TB	3U DW	4U DW	137TB	3U DW	4U DW	4U DW	3U DW	4U DW	4U DW	4U DW

Figures define effective storage capacity | Capacities above 182TB require a COLDSTORE 3U DW or 4U DW | 750Mbps maximum bit rate

TECHNICAL SPECIFICATION

COLDSTORE[®]
2U DW

GENERAL		Storage server with embedded DW Spectrum video recording system COLDSTORE sequential storage system 8 x 3.5" removable drive bays with locking feature Dual gigabit Ethernet ports Single or dual hot-swappable										
SYSTEM & SOFTWARE		Linux OS on solid-state disk COLDSTORE firmware running L.A.I.D. [™] and S.F.S. [™] DW Spectrum VMS on solid-state disk Via NTP (Veracity's TIMENET Pro recommended) COLDSTORE via SITESCAPE on Client PC DW Spectrum Server via DW Spectrum Desktop on Client PC										
VMS SYSTEM		DW Spectrum (Linux version) - licensed per channel - Recording licenses not included Recording licenses are available from all DW Spectrum distributors in North America Integration API available DW Spectrum (Windows/Linux/Mac for desktop, iOS/Android for mobile) - license free Up to 256 channels (including active VMD on secondary streams) Auto-discovery plus manual add and remove S and T supported in addition to native SDKs. H.265 compatible Server hive system - synchronization of user and configuration data on all units Supported (with multiple COLDSTORE DW systems) Up to 100 servers supported										
CAPACITY		SATA disks - almost all makes, models and sizes supported (including SMR) Maximum available disk sizes supported (inc. 24TB and 26TB) 208TB maximum array capacity (with 26TB disks) 182TB in normal COLDSTORE mirrored-overlapping pair mode (with 26TB disks)										
POWER		Single fixed PSU or optional dual-redundant hot-swappable PSU 110-240V AC 50/60Hz Input (Auto sensing) 50 watts typical maximum (PSU rated at 500W or dual 550W)										
PHYSICAL/ENVIRONMENTAL		19" rack width, 2U high, 573mm deep (W 442mm x H 90mm x D 573mm) 11.7kg [26lbs] (including mounting rails but without disks) 5°C to 50°C [41°F to 122°F] Up to 85%, non-condensing CE, FCC, UKCA, RoHS, NDAA, TAA, BIS										
PRODUCT CODES		COLDSTORE 8-Bay 2U unit, embedded DW Spectrum VMS, single PSU & US power cable COLDSTORE 8-Bay 2U unit, embedded DW Spectrum VMS, dual PSU & US power cables DW Spectrum VMS Recording Licenses are available from all Digital Watchdog Distributors in North America. *DW Pro License - <i>No recurring annual fees and including free software upgrades (excluding major revisions)</i>										

Disk Size	TB	6	8	10	12	16	18	20	22	24	26
Raw Capacity	TB	48	64	80	96	128	144	160	176	192	208
Effective Capacity	TB	42	56	70	84	112	126	140	154	168	182

© Veracity UK Ltd 2025. All rights reserved. DV1.2EN
Under no circumstances should this document be reproduced,
distributed or changed, partially or wholly, without written, formal
authorization from Veracity UK Ltd. COLDSTORE[®], TIMENET
Pro[®] and SITESCAPE[®] are trademarks of Veracity UK Ltd.



Veracity HQ
Prestwick International
Aerospace Park
4 Dow Road, Prestwick
KA9 2TU
UK
Tel +44 (0) 1292 264967
www.veracityglobal.com
sales@veracityglobal.com

See www.veracityglobal.com
for country & region specific contacts.