



COLDSTORE Opus **User Guide**

Version 1.2.1

Contents

1)	Introduction	5
2)	Admin	7
	Profile for root	7
3)	Event Alerts	8
	Event Alert Recipients	8
4)	Event Mail Format	9
5)	Event Mail Servers	10
6)	Event Services	11
	Network interface Eth0/Eth1/Bond	11
	Filesystem space rootfs	11
	Filesystem space boot	11
7)	Configuration	12
	DHCP	12
	Network IPv4	12
i)	Eth0 IPv4 Address	12
ii)	Eth0 IPv4 Subnet Mask	12
iii)	Eth1 IPv4 Address	12
iv)	Eth1 IPv4 Subnet Mask	12
v)	IPv4 Gateway 1	12
vi)	IPv4 Gateway 2	13
vii)	IPv4 DNS Server 1	13
viii)	IPv4 DNS Server 2	13
ix)	IPv4 DNS Server 3	13
	Network IPv6	13
i)	Eth0 IPv6 Address	13
ii)	Eth0 IPv6 Subnet Mask	13

iii)	Eth1 IPv6 Address	13
iv)	Eth1 IPv6 Subnet Mask	13
v)	IPv6 Gateway 1	13
vi)	IPv6 Gateway 2	13
vii)	IPv6 DNS Server 1	13
viii)	IPv6 DNS Server 2	13
ix)	IPv6 DNS Server 3	14
	Network Bonding	14
	Network Share	14
i)	Network Security Mode	14
ii)	Mode	14
iii)	User Name	14
iv)	Password	14
v)	Share Name	15
	Time	15
i)	Time Zone	15
ii)	NTP Server 1	15
iii)	NTP Server 2	15
iv)	NTP Server 3	15
	Advanced	15
i)	Reserved Drive Space	15
ii)	RAM Drive File Settle Time	15
iii)	Force Format	15
	Validation of Entered Values	16
	Export	16
	Import	16
	Factory Reset	16
i)	Factory Reset (preserve IP settings)	16
ii)	Factory Reset (reset all settings)	17
8)	Status	18




	Array Status	18
	Disk Status	18
	Force Disk Step	18
	Erase Selected Slots	19
	Shut Down Selected Slots	19
9)	Firmware Upload	20
	Manual Upload	20
	Auto Upload	21

1) Introduction


This document describes how to use the COLDSTORE Opus web interface. This can be accessed from SITESCAPE or directly from a browser on port 8081.

After opening the web interface for the first time, you will be prompted to set the root password.

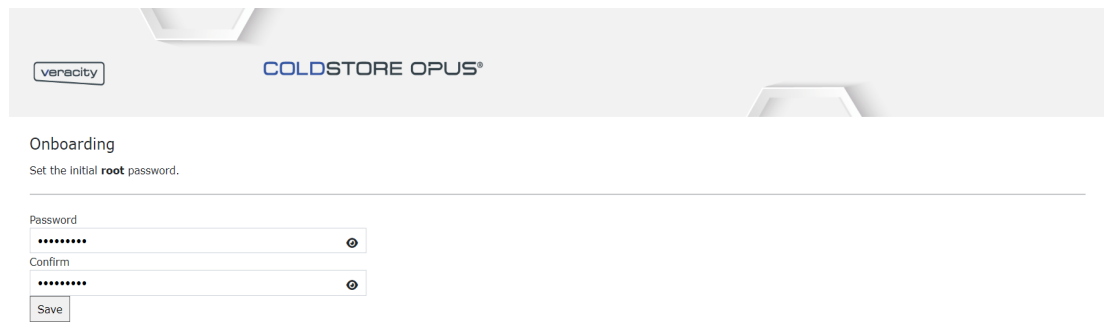


The screenshot shows the 'Onboarding' screen of the COLDSTORE OPUS web interface. At the top, there is a header with the Veracity logo and the text 'COLDSTORE OPUS®'. Below the header, the title 'Onboarding' is displayed, followed by the instruction 'Set the initial **root** password.' The form consists of two input fields: 'Password' and 'Confirm', both with masked characters (dots) and a toggle icon to the right. Below these fields is a 'Save' button.

Enter the desired password in the Password field and also in the Confirm field, and click Save. The unit will reboot to apply this configuration change. During this time the web page will show Configuration Update Pending.

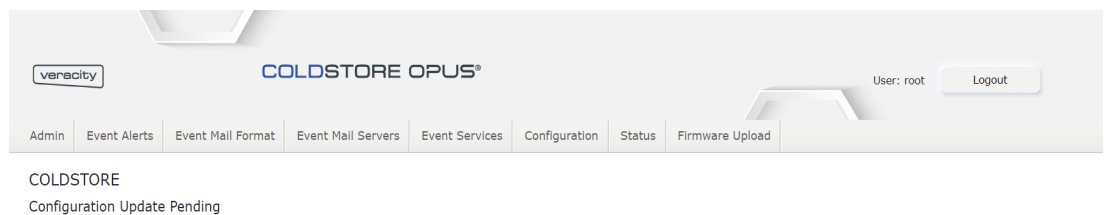

The screenshot shows the 'Configuration Update Pending' screen. The header is identical to the previous screen. Below the header, there is a navigation bar with the following tabs: Admin, Event Alerts, Event Mail Format, Event Mail Servers, Event Services, Configuration, Status, and Firmware Upload. To the right of the navigation bar, the text 'User: root' and a 'Logout' button are visible. Below the navigation bar, the text 'COLDSTORE Configuration Update Pending' is displayed.

Once a root password has been set, you will be presented with a login page when opening the web interface. The username is root and the password is that which was previously set.

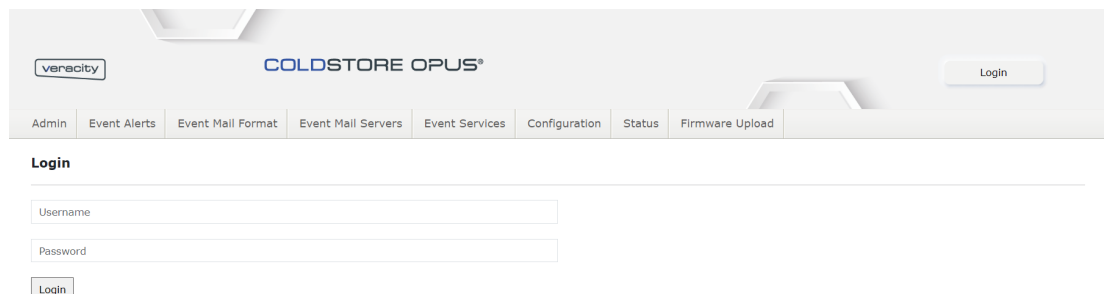

The screenshot shows the 'Login' screen. The header is identical to the previous screens. Below the header, there is a navigation bar with the following tabs: Admin, Event Alerts, Event Mail Format, Event Mail Servers, Event Services, Configuration, Status, and Firmware Upload. To the right of the navigation bar, a 'Login' button is visible. Below the navigation bar, the title 'Login' is displayed. The form consists of two input fields: 'Username' and 'Password'. Below these fields is a 'Login' button.



Once you have logged in, a welcome message with the web interface version will be shown.

COLDSTORE OPUS®

User: root Logout

Admin | Event Alerts | Event Mail Format | Event Mail Servers | Event Services | Configuration | Status | Firmware Upload

COLDSTORE

Welcome to the Veracity COLDSTORE web interface

Installed software and versions

Name	Version
COLDSTORE firmware	CS-PRO v2.2.1.160
COLDSTORE Web interface	0.9.10-alpha.g19777d9bcf
COLDSTORE Opus	v1.0.8-137-g456ca11

2) Admin

The Admin page is used to configure access to the web interface.

Profile for root

Profile for root

First name (optional)	John
Last name (optional)	Doe
Email Address (optional)	Enter email address
Comment (optional)	Enter comment
Password (required)	*****
New password	Enter new password
Confirm password	Enter the new password again

It is recommended that you change the password from the default. To change the password for root, enter the existing password in the 'Password' field, along with the new password in the 'New password' and 'Confirm password' fields, then click Apply.

You can also enter the first name, last name email address and a comment for this user. These fields are optional and have no effect on the functionality of the web interface.

SSL Certificate

This is the SSL certificate that the web server uses for the HTTPS protocol.

SSL Certificate

File

Password

Enter the certificate password

Click 'Browse' to select the .pfx containing the certificate and enter the certificate password in the 'Password' field, then click 'Apply'.

These changes will not take effect until the COLDSTORE Opus is restarted.

3) Event Alerts

The Event Alerts page is used to add and remove email recipients for generated events.

Event Alert Recipients

Event Alert Recipients

If an event occurs then an alert message will be sent to the configured recipient(s). Add/remove recipient email addresses below, then apply or cancel the changes.

Alert recipient

Enter recipient email address Add

Configured alert recipients

Email address	
john.doe@veracityglobal.com	Remove

Apply Cancel

To add a new recipient, enter the email address in the 'Alert recipient' field and click 'Add'.

The existing list of email recipients is shown in the 'Configured alert recipients' section.

Click 'Remove' to remove any entries from this list.

Click 'Apply' to apply all changes.

4) Event Mail Format

The Event Mail Format page is used to configure the format of event-triggered emails.

The Send from Field is mandatory.

The Reply to, Subject and Message fields are optional.

The Subject and Message fields can contain fixed text and/or pre-defined variables that are expanded by the server prior to the sending of the email. The pre-defined variables contain information relating to the nature of the event and are listed below.

Event Mail Format

The event alert message may be customized. Supply the customizations below, then click Apply or Cancel to make the changes permanent

Send from

coldstore@veracityglobal.com

Reply to (optional)

no-reply@veracityglobal.com

Subject (optional)

COLDSTORE alert -- \$SERVICE \$EVENT

Message (optional)

Date: \$DATE

Action: \$ACTION

Host: \$HOST

Description: \$DESCRIPTION

Sincerely,

Veracity

Apply

Cancel

Date: \$DATE Action: \$ACTION Host: \$HOST Description: \$DESCRIPTION Sincerely, Veracity

Notes

The subject and message body may contain variables that are expanded by the server. This is the list of variables that can be used when composing an alert message.

Variable	Description
\$EVENT	A string describing the event that occurred.
\$SERVICE	The service name.
\$DATE	The current time and date (RFC 822 date style).
\$HOST	The host name the server is running on.
\$ACTION	The name of the action that was done.
\$DESCRIPTION	The description of the error condition.

5) Event Mail Servers

The Event Mail Servers page is used to configure the list of email servers which are used to send event-triggered emails.

Event Mail Servers

Use the Add server button to add a new mail server or select a mail server to edit/remove.

Name	Port	Username	SSL
Add server			

Click on 'Add server' to add a new email server to the list.

Event Mail Server Details

Name	
New server	
Port (optional)	
Enter port number	
Username (optional)	
Enter username	
Password (optional)	
Enter password	
SSL	☐
Update	Remove

Enter the server and user details in the Name, Port, Username and Password fields, and check the SSL option if required. Click 'Update' to add this server.

Event Mail Servers

Use the Add server button to add a new mail server or select a mail server to edit/remove.

Name	Port	Username	SSL
Mail Server	465	mailuser	☒
Add server			


To modify server details, click on the server in the list to open the Event Mail Server Details form again.

To remove a server from the list, click on the server to open the Event Mail Server Details form, then click 'Remove'.

6) Event Services

The Event Services page is used to configure which event services are to be monitored.

Check the 'Enable' option for all services that you wish to monitor.

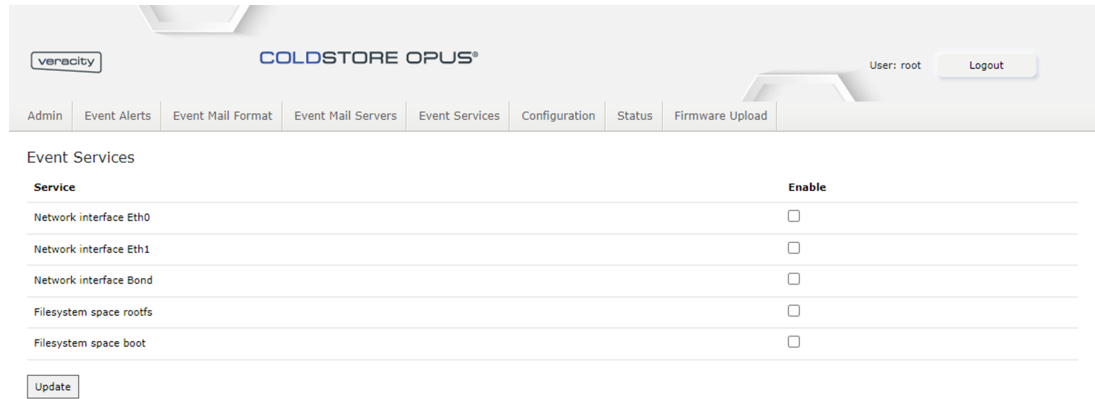

The screenshot shows the 'Event Services' configuration page in the COLDSTORE OPUS interface. The page has a header with the Veracity logo, the product name 'COLDSTORE OPUS', and a user session bar showing 'User: root' and a 'Logout' button. A navigation menu at the top includes links for Admin, Event Alerts, Event Mail Format, Event Mail Servers, Event Services (which is highlighted), Configuration, Status, and Firmware Upload. The main content area is titled 'Event Services' and contains a table with two columns: 'Service' and 'Enable'. The table lists five services: 'Network interface Eth0', 'Network interface Eth1', 'Network interface Bond', 'Filesystem space rootfs', and 'Filesystem space boot'. Each service has an unchecked checkbox in the 'Enable' column. Below the table is an 'Update' button.

Service	Enable
Network interface Eth0	☐
Network interface Eth1	☐
Network interface Bond	☐
Filesystem space rootfs	☐
Filesystem space boot	☐

When enabled, an email will be sent on service failure or pre-failure. The conditions for these are described below.

Network interface Eth0/Eth1/Bond

An email will be sent if the specific network link is down.

Filesystem space rootfs

An email will be sent if the rootfs partition is more than 80% full. If you receive this event please contact Veracity Support.

Filesystem space boot

An email will be sent if the boot partition is more than 80% full. If you receive this event please contact Veracity Support.

7) Configuration

The Configuration page is used to configure the network, time and storage properties of the COLDSTORE Opus.

DHCP

The DHCP section is used to enable or disable the DHCP mode of each network interface.

DHCP

Eth1 DHCP	Disabled
Eth2 DHCP	Disabled

Set this to 'Enabled' for any interface for which you wish to have the IP address and subnet mask assigned by a DHCP server. Note that enabling DHCP will remove the option to manually set the IPv4 and IPv6 address and subnet mask for that interface.

Network IPv4

The Network IPv4 section is used to configure the IPv4 address and subnet mask of each network interface and the IPv4 gateways and DNS servers. Note that not all fields may be visible, depending on the DHCP and Bonding settings.

Network IPv4

Eth0 IPv4 Address	10.3.7.25
Eth0 IPv4 Subnet Mask	255.224.0.0
Eth1 IPv4 Address	
Eth1 IPv4 Subnet Mask	
IPv4 Gateway 1	10.0.0.254
IPv4 Gateway 2	
IPv4 DNS Server 1	10.0.0.30
IPv4 DNS Server 2	
IPv4 DNS Server 3	

i) Eth0 IPv4 Address

The IPv4 address of the first network port.

ii) Eth0 IPv4 Subnet Mask

The IPv4 subnet mask of the first network port.

iii) Eth1 IPv4 Address

The IPv4 address of the second network port.

iv) Eth1 IPv4 Subnet Mask

The IPv4 subnet mask of the second network port.

v) IPv4 Gateway 1

The IPv4 address of the first gateway.

vi) IPv4 Gateway 2

The IPv4 address of the second gateway.

vii) IPv4 DNS Server 1

The IPv4 address of the first DNS server.

viii) IPv4 DNS Server 2

The IPv4 address of the second DNS server.

ix) IPv4 DNS Server 3

The IPv4 address of the third DNS server.

Network IPv6

The Network IPv6 section is used to configure the IPv6 address and subnet mask of each network interface and the IPv6 gateways and DNS servers. Note that not all fields may be visible, depending on the DHCP and Bonding settings.

Network IPv6	
Eth0 IPv6 Address	
Eth0 IPv6 Subnet Mask	
Eth1 IPv6 Address	
Eth1 IPv6 Subnet Mask	
IPv4 Gateway 1	
IPv4 Gateway 2	
IPv6 DNS Server 1	
IPv6 DNS Server 2	
IPv6 DNS Server 3	

i) Eth0 IPv6 Address

The IPv6 address of the first network port.

ii) Eth0 IPv6 Subnet Mask

The IPv6 subnet mask of the first network port.

iii) Eth1 IPv6 Address

The IPv6 address of the second network port.

iv) Eth1 IPv6 Subnet Mask

The IPv6 subnet mask of the second network port.

v) IPv6 Gateway 1

The IPv6 address of the first gateway.

vi) IPv6 Gateway 2

The IPv6 address of the second gateway.

vii) IPv6 DNS Server 1

The IPv6 address of the first DNS server.

viii) IPv6 DNS Server 2

The IPv6 address of the second DNS server.

ix) IPv6 DNS Server 3

The IPv6 address of the third DNS server.

Network Bonding

The Network Bonding section is used to enable or disable the bonding mode of the two network interfaces.

Network Bonding	
Bonding	Disabled

If bonding is enabled, Eth0 and Eth1 are bonded in active-backup mode, using the IPv4, IPv6 and DHCP settings for Eth0. All Eth1 settings are unused and hidden.

If bonding is disabled, Eth0 and Eth1 are independent network interfaces, each with their own IPv4, IPv6 and DHCP settings.

Network Share

The Network Share section is used to configure the Security mode, User mode, User name, password and share name of the network share. Note that not all fields may be visible, depending on the Network Security Mode setting.

Network Share	
Network security mode	User
Mode	User Only
User name (max length 32)	coldstoreuser
Password	*****
Share name (max length 80)	share

i) Network Security Mode

Currently, only User mode is supported. This allows the share to be protected by a single user name and password.

ii) Mode

'Guest Only' mode grants read/write access to the network share to the guest account only.

'User Only' mode grants read/write access to the network share to the specified user account only.

'User & Read-only Guest' mode grants read/write access to the network share to the specified user account and read-only access to the guest account.

'User & Guest' mode grants read/write access to the network share to the specified user and guest accounts.

iii) User Name

The name used for user-based access control. This field is hidden and unused if the mode is set to Guest Only.

iv) Password

The password used for user-based access control. This field is hidden and unused if the Mode is set to Guest Only.

v) Share Name

The share name used to access the storage on the network. For example, from a Windows client, the UNC path would be \\server\sharename

Time

The Time section is used to configure the time zone and NTP servers for the COLDSTORE Opus.

Time	
Time Zone	America/Chicago
NTP Server 1	pool.ntp.org
NTP Server 2	
NTP Server 3	

i) Time Zone

The time zone for the location of the COLDSTORE Opus.

ii) NTP Server 1

The first NTP server, either an IP address or if DNS is configured, a FQDN.

iii) NTP Server 2

The second NTP server, either an IP address or if DNS is configured, a FQDN.

iv) NTP Server 3

The third NTP server, either an IP address or if DNS is configured, a FQDN.

Advanced

The Advanced section is used to configure settings relating to the tuning of the COLDSTORE Opus operation relating to its storage.

Advanced	
Reserved drive space (100-1000 GB)	100
RAM Drive file settle time (1-60 seconds)	15
Force Format	Enabled

i) Reserved Drive Space

The minimum amount of space to be left unused on each HDD. A disk step will be triggered when the free space on any writing HDD reaches this value.

Note that it is necessary to leave some free space to account for delays in filesystem free space reporting.

ii) RAM Drive File Settle Time

The minimum delay between file closure and it being moved from the RAM drive buffer to the writing HDDs.

iii) Force Format

This is used to determine how COLDSTORE Opus handles a newly inserted HDD.

If enabled, COLDSTORE Opus will format and use it, even if it contains an existing filesystem and/or partition table. This will result in any existing data being permanently deleted.

If disabled, COLDSTORE Opus will only format and use it if it is blank. If it contains an existing filesystem and/or partition table, COLDSTORE Opus will not use it, preserving any existing data.

Validation of Entered Values

After changing any configuration settings and clicking 'Apply', all settings are validated.

If any are invalid, a message is displayed.

Apply	Cancel	Export	Import	Validation failed for Network IPv4 Eth1 IPv4 Address: Incorrect length or invalid characters present.
-------	--------	--------	--------	---

If all settings are valid, they are sent to the COLDSTORE Opus and the Configuration page shows that the update is pending.

Configuration
Configuration Update Pending

Refresh in 1 seconds

Depending on the particular changes, the COLDSTORE Opus may perform a reboot. Please allow several minutes for the unit to come back online.

Export

Click the 'Export' button to export the settings. This will be saved as a text file called coldstore_settings.txt

Import

Click the 'Import' button to import a previously exported settings file. You will be presented with a File Open dialog to select the appropriate file.

Factory Reset

i) Factory Reset (preserve IP settings)

Click on this button to perform a factory reset of the COLDSTORE Opus, while preserving the existing IP settings.

Factory Reset	
Factory Reset (preserve IP settings)	Type confirm and click -> Confirm Partial Factory Reset
Factory Reset (reset all settings)	

To prevent accidental factory resets you must type 'confirm' in the text box and click 'Confirm Partial Factory Reset' to proceed.

Please allow several minutes for the unit to come back online.

ii) Factory Reset (reset all settings)

Click on this button to perform a factory reset of the COLDSTORE Opus, including the existing IP settings.

Factory Reset

Factory Reset (preserve IP settings)	
Factory Reset (reset all settings)	Type <i>confirm</i> and click -> Confirm Full Factory Reset

To prevent accidental factory resets you must type 'confirm' in the text box and click 'Confirm Full Factory Reset' to proceed.

Please allow several minutes for the unit to come back online.

8) Status

The Status page is used to display information about the array and individual disks. It is also used to perform operations on the disks.

Array Status

The Array Status section is used to display information about the entire array.

Array Status	
Capacity	Used
8201 GB	464 GB

It shows the capacity of the array and the amount of space which has been used.

Disk Status

The Disk Status section is used to display information about the individual disks.

Disk Status					
Slot	Capacity	Used	Writing	Status	
6	8001 GB	312 GB	No	Online	☐
9	250 GB	154 GB	No	Online	☐
10	250 GB	2 GB	Yes	Online	☐
11	250 GB	2 GB	Yes	Online	☐

At any given time, there should be two disks assigned for writing.

The blue oval shows the selection boxes for each individual disk. Use these when selecting disks for erase and shutdown operations.

The red circle shows the select/deselect all box. Use this to quickly select or deselect all disks.

Force Disk Step

Force Disk Step	Confirm Disk Step
-----------------	-------------------

Click the 'Force Disk Step' button to force the system to do a disk step. Click the 'Confirm Disk Step' button which appears, to complete the operation.

Erase Selected Slots

When one or more disks are selected, the 'Erase Selected Slots' button will appear.

Disk Status

Slot	Capacity	Used	Writing	Status	☐
6	8001 GB	312 GB	No	Online	☐
9	250 GB	154 GB	No	Online	☒
10	250 GB	2 GB	Yes	Online	☐
11	250 GB	2 GB	Yes	Online	☐

Force Disk Step

Erase Selected Slots

Shut Down Selected Slots

Click the 'Erase Selected Slots' button to erase these slots.

Erase Selected Slots Type *confirm* and click -> Confirm Erase

To prevent accidental erasures, you must type 'confirm' in the text box and click 'Confirm Erase' to proceed.

Please allow several minutes for this operation to complete.

Shut Down Selected Slots

When one or more disks are selected, the 'Shut Down Selected Slots' button will appear.

Disk Status

Slot	Capacity	Used	Writing	Status	☐
6	8001 GB	312 GB	No	Online	☐
9	250 GB	154 GB	No	Online	☒
10	250 GB	2 GB	Yes	Online	☐
11	250 GB	2 GB	Yes	Online	☐

Force Disk Step

Erase Selected Slots

Shut Down Selected Slots

Click the 'Shut Down Selected Slots' button to shut down these slots.

Shut Down Selected Slots Type *confirm* and click -> Confirm Shutdown

To prevent accidental shutdowns, you must type 'confirm' in the text box and click 'Confirm Shutdown' to proceed.

Please allow several minutes for this operation to complete. Once it has, the disk status will changed to 'Unmounted'. Disks in this state are ready to be physically removed from the COLDSTORE Opus.

Disk Status

Slot	Capacity	Used	Writing	Status	☐
6	8001 GB	312 GB	No	Online	☐
9	223 GB	24 GB	No	Unmounted	☐
10	250 GB	2 GB	Yes	Online	☐
11	250 GB	2 GB	Yes	Online	☐

Shut down disks command successfully sent

[Force Disk Step](#)

9) Firmware Upload

The Firmware Upload page is used to upload firmware packages to the COLDSTORE Opus. These include the base COLDSTORE Opus firmware as well as the web interface and the COLDSTORE Opus package.

Firmware Upload

Manual Upload

[Browse](#)

[Install](#)

Auto Upload

Please wait - scanning Veracity downloads server for firmware files

You can upload firmware manually or automatically.

Manual upload allows you to specify a local file to upload.

Automatic upload scans the Veracity downloads server, and then allows you to specify which package should be uploaded. There may be a delay of several minutes before any packages are shown in the Auto Upload section, while waiting for the scan to complete.

Note that it is necessary to have internet access from the client computer. The COLDSTORE Opus itself does not need internet access.

Manual Upload

Click on the 'Browse' button to be presented with a File Open dialog. Select the file to be uploaded. Note that the file name should end with '-enc.zip'. Click the 'Install' button to begin the upload process. The file will be uploaded with a progress indicator shown.

Firmware Upload

×

Uploading: 30% complete

Cancel

Once the file upload is complete, the firmware upgrade will begin. Please allow several minutes for this to complete. The COLDSTORE Opus may reboot during this process.

Auto Upload

Click the 'Refresh' button to force a rescan of the Veracity downloads server.

Once the scan is complete, a list of compatible packages will be shown.

The 'Firmware' section shows the base COLDSTORE Opus firmware packages.

The 'Other' section shows the other COLDSTORE Opus packages, such as the web interface and COLDSTORE Opus.

Firmware	
Version	
2.1.6.155	<button>Install</button>
2.1.5.154	<button>Install</button>
2.1.4.153	<button>Install</button>
Other	
File	Version

Click the 'Install' button for the version and package that you wish to install. The file will be transferred from the downloads server to the COLDSTORE Opus.

Firmware Upload



Uploading: 3% complete

Cancel

Once the file transfer is complete, the firmware upgrade will begin. Please allow several minutes for this to complete. The COLDSTORE Opus may reboot during this process.